
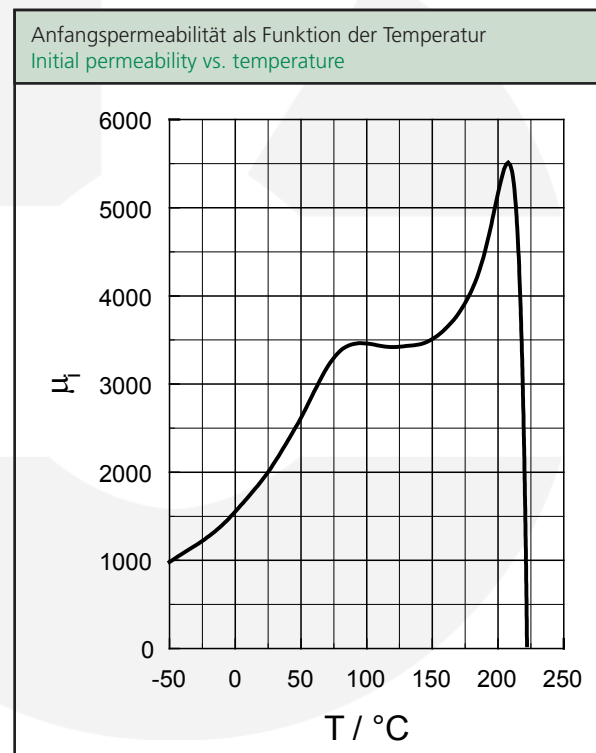






	Symbol / symbol	Wert / value	Einheit / unit
Anfangspermeabilität / initial permeability	μ_i	$2000 \pm 25\%$	-
Flussdichte / flux density	B_{max}	≥ 455	mT
bei Feldstärke / at field strength	H_{max}	800	A/m
Remanenz / remanence	B_r	≥ 200	mT
Koerzitivfeldstärke / coercive force	H_c	≤ 25	A/m
Curie-Temperatur / Curie temperature	T_c	≥ 200	°C
Bez. Temperaturbeiwert / rel. temperature coefficient	α_r		$10^{-6}/K$
bei / at -25°C ... +25°C		$\leq 3,5$	
+25°C ... +70°C		$\leq 6,5$	
Spez. Verlustleistung (typische Werte) spec. power losses (typical values)	P_v		mW/cm ³
bei / at 50kHz, 200mT, 100°C		300	
100kHz, 200mT, 100°C			
200kHz, 100mT, 100°C			
Gleichstromwiderstand / resistivity	ρ	≥ 1	Ωm
Sinterrohddichte / sintered density	γ	$\approx 4,8$	g/cm ³

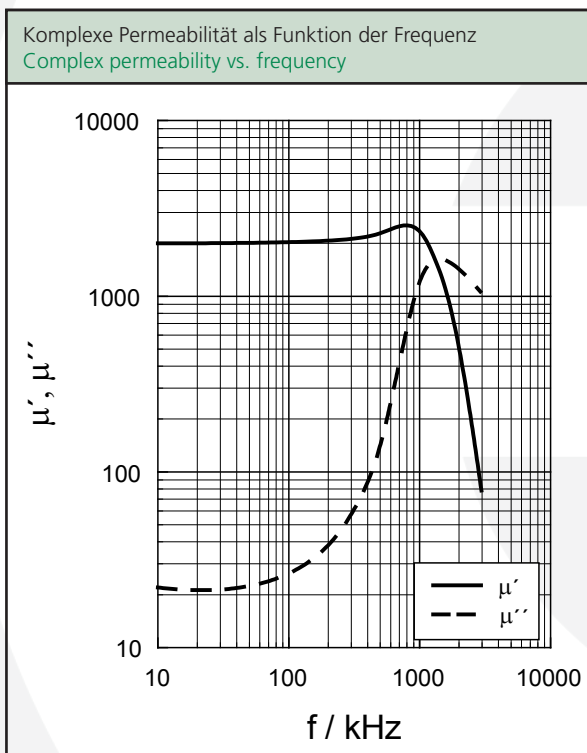

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de

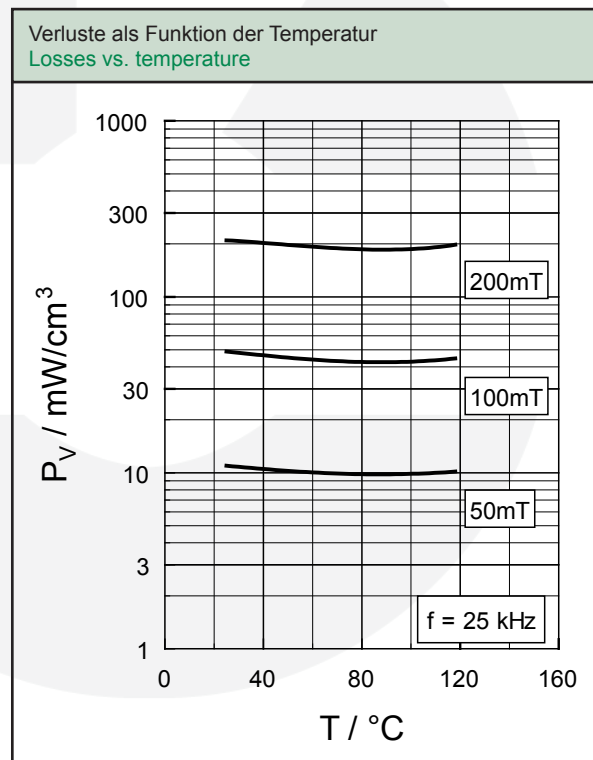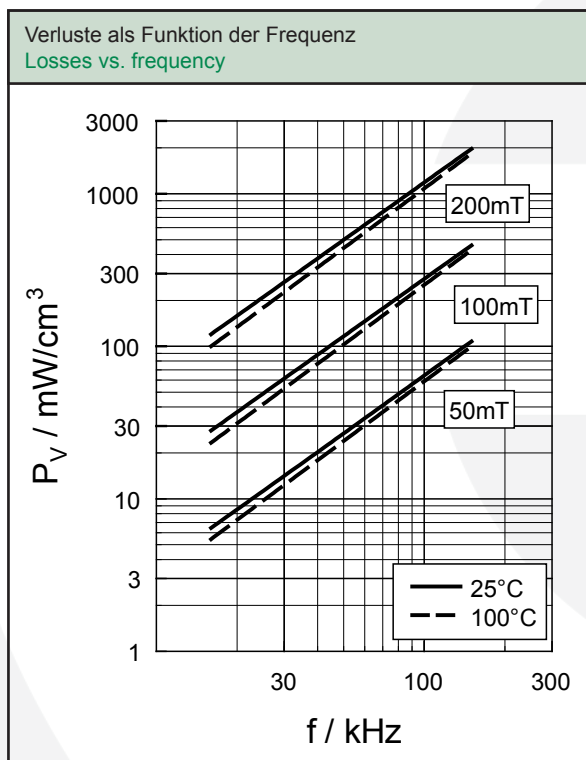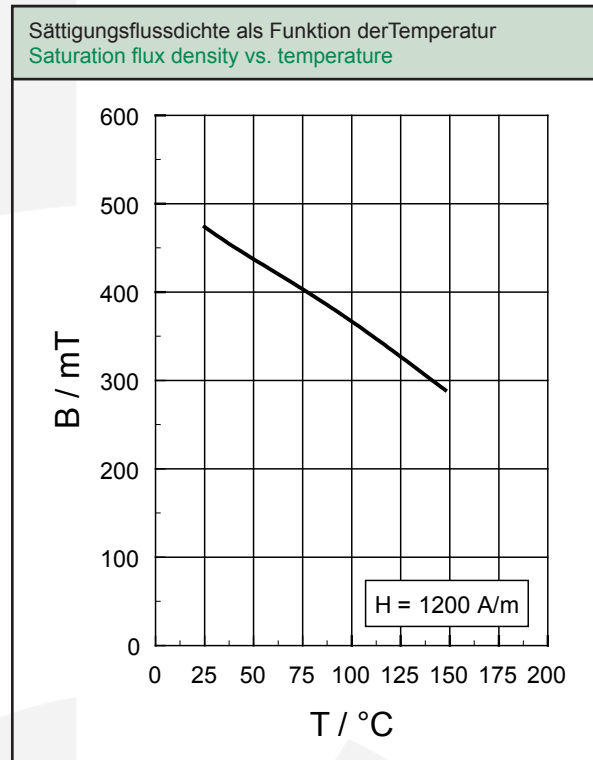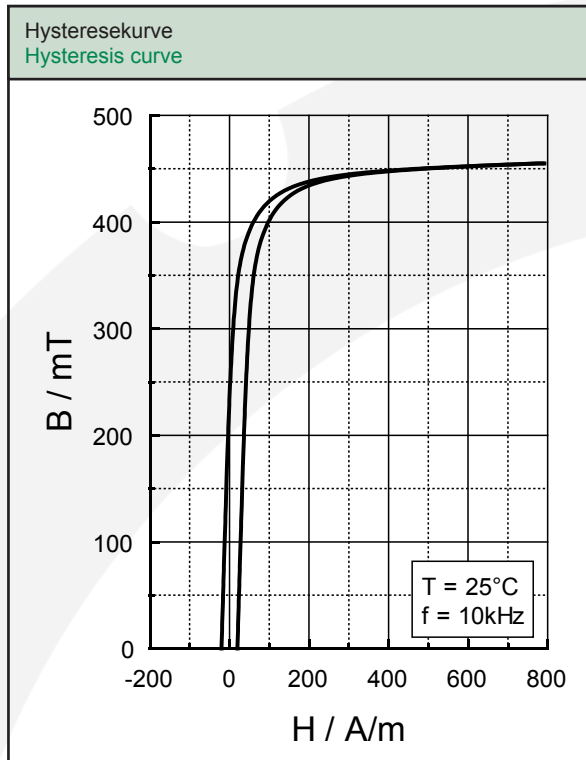

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de