



	Symbol / symbol	Wert / value	Einheit / unit
Anfangspermeabilität / initial permeability	μ_i	6000 \pm 25%	-
Flussdichte / flux density bei Feldstärke / at field strength	B_{max} H_{max}	≥ 370 800	mT A/m
Remanenz / remanence	B_r	≥ 150	mT
Koerzitivfeldstärke / coercive force	H_c	≤ 10	A/m
Curie-Temperatur / Curie temperature	T_c	≥ 130	$^{\circ}$ C
Bez. Temperaturbeiwert / rel. temperature coefficient bei / at -25 $^{\circ}$ C ... +25 $^{\circ}$ C +25 $^{\circ}$ C ... +70 $^{\circ}$ C	α_r	≤ 2 ≤ 1	10^{-6} /K
Bez. Verlustfaktor / rel. loss factor bei / at 10 kHz 100 kHz 200 kHz	$\tan\delta/\mu_i$	≤ 4 ≤ 30 ≤ 100	10^{-6}
Gleichstromwiderstand / resistivity	ρ	$\geq 0,1$	Ω m
Sinterrohddichte / sintered density	γ	$\approx 4,8$	g/cm 3

Komplexe Permeabilität als Funktion der Frequenz
Complex permeability vs. frequency

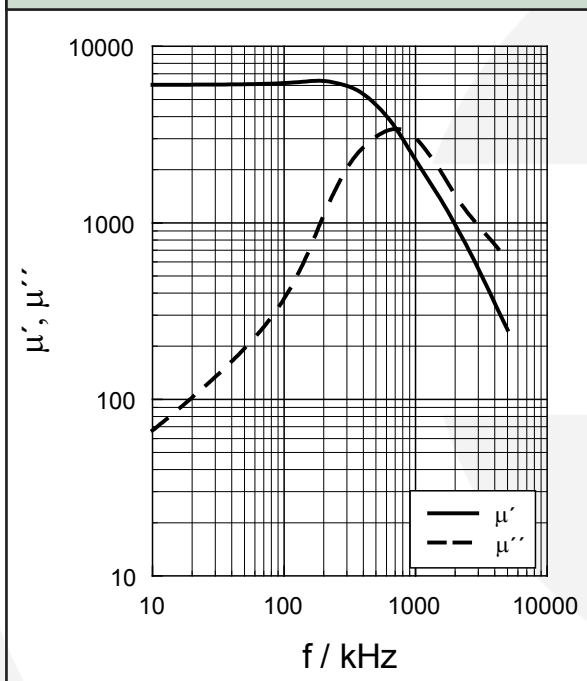



Anfangspermeabilität als Funktion der Temperatur
Initial permeability vs. temperature

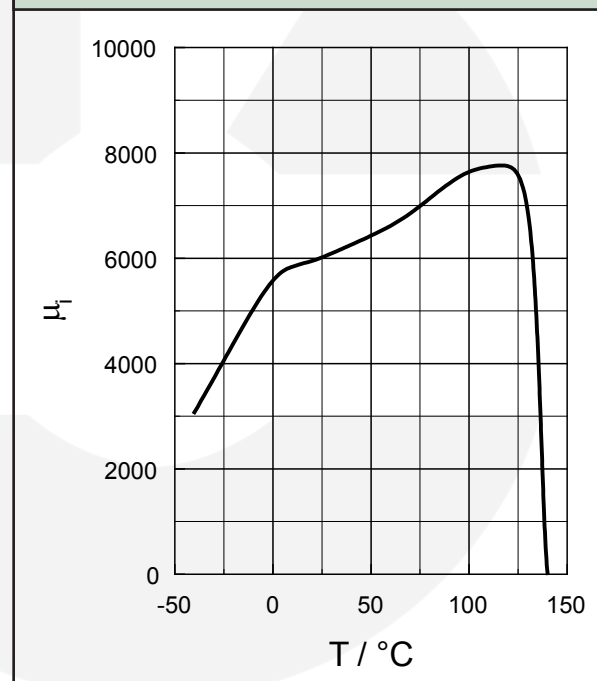

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de

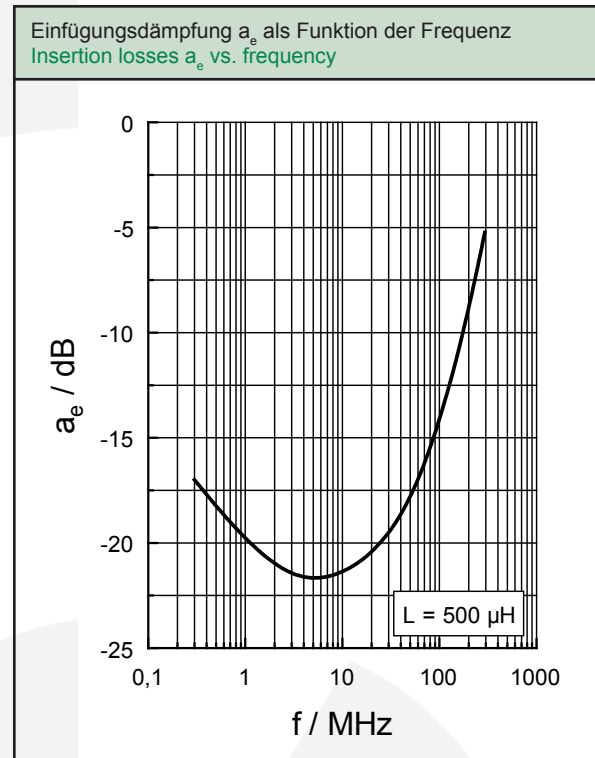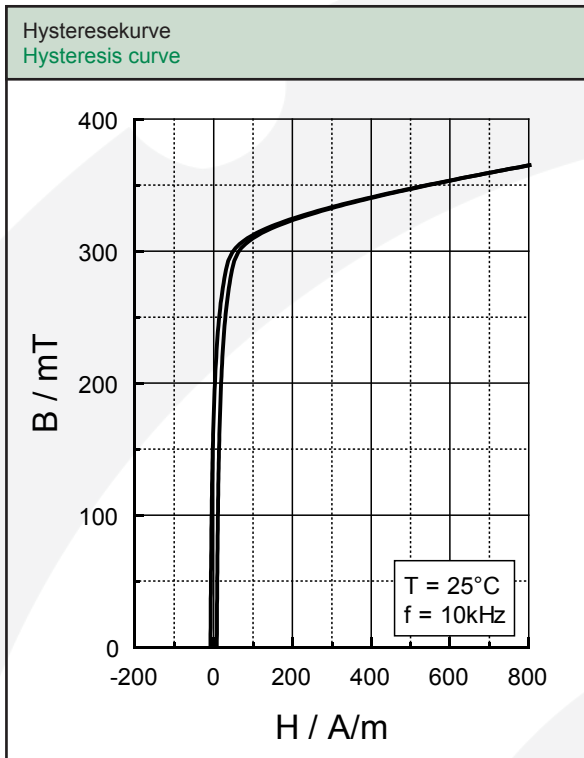

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de